


# HPCC

## High Performance Composite Coating

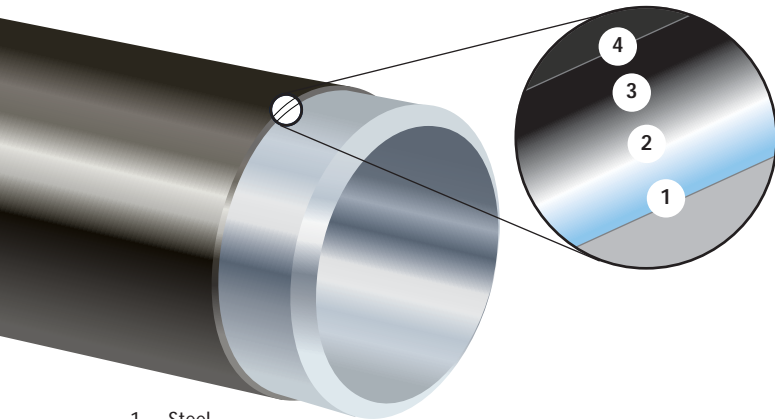

1. Steel
2. Fusion Bonded Epoxy
3. FBE/Adhesive Interface
4. Polyethylene

### Product Description

High Performance Composite Coating (HPCC) is an advanced composite system that represents the latest development in anti-corrosion systems. **The product consists of fusion bonded epoxy, polyolefin adhesive and tough polyethylene.** HPCC is designed to protect buried oil and gas pipelines in environments where superior mechanical protection, moisture and corrosion resistance and moderate to high operating performance characteristics are required.

### Applications



Oil & Gas Pipelines



Small Diameter Pipelines



Large Diameter Pipelines



Wet Environments

### Related Standards and Specifications

- CSA Z245.21 (System B2)
- ISO 9001:2008

*For additional standards and specifications with which this product complies, please contact your Bredero Shaw representative. In Canada, consult Shaw Pipe.*



### Long Term Corrosion Protection

- The FBE component of HPCC provides excellent adhesion to steel, providing superior long term corrosion resistance and protection of pipelines operating up to 85°C.
- The superior adhesion properties of the FBE also provide excellent resistance to cathodic disbondment, reducing the cost of cathodic protection during the operation of the pipeline.

### Fused Monolithic Coating System

- The unique application process of HPCC provides a fused, monolithic profile that prevents delamination and loss of adhesion.
- The system demonstrates excellent field handling and flexibility characteristics, minimizing construction installation costs.

### Very Good Mechanical Protection

- HPCC provides excellent uniform coverage of the weld bead profile, preventing "tenting" and weaknesses in the coating cross-section.
- Polyethylene component protects the pipeline during transportation, reducing costly repairs while also providing added in-ground protection against shear forces, chemicals and abrasive soil conditions.

### Flexible Solutions

- Advanced manufacturing techniques allow the HPCC System to be customized to your specific project.
- Can be applied to various pipe diameters from 400 mm (16") to over 1066 mm (42").
- Can be applied in a wide range of thicknesses to cost effectively meet unique project specifications and performance requirements.

## High Performance Composite Coating

### Typical Plant Capabilities and Product Properties


| Capability/Property                             | HPCC          |
|---|---------------|
| Minimum Pipe Diameter .....                     | 400 mm (16")  |
| Maximum Pipe Diameter .....                     | 1066 mm (42") |
| Minimum Pipe Length .....                       | 18.3 m (60')  |
| Maximum Pipe Length.....                        | 25 m (82')    |
| Minimum Recommended Operating Temperature ..... | -40°C (-40°F) |
| Maximum Recommended Operating Temperature ..... | 85°C (185°F)  |

Values shown are typical and may vary from plant to plant. Consult Bredero Shaw for special requirements. In Canada, consult Shaw Pipe.



HPCC\_rev021

### Product Application Process

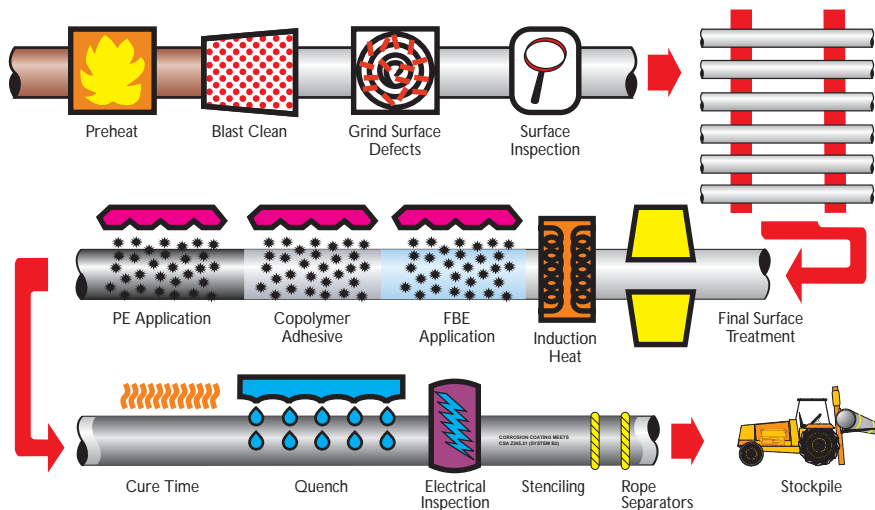

### Plants

#### North America

Camrose, Alberta  
Regina, Saskatchewan

#### EMAR

Jubail, Saudi Arabia (planned)

### About Bredero Shaw

Bredero Shaw is the global leader in pipe coating solutions. With more than 80 years of experience, the largest team of dedicated pipe coating professionals, the most extensive network of strategically located plants worldwide and with proven innovative coating technologies, the company has protected more pipelines in virtually every environment and operating condition than anyone in the industry.

Bredero Shaw offers technologically advanced solutions for anti-corrosion coatings, protective and weight coatings, thermal flow assurance coatings, internal coatings, custom coatings and field joints for both onshore and offshore applications. This broad range of products and services provides Bredero Shaw with the unique capability to service the full spectrum of pipeline protection and flow assurance requirements. Consult your Bredero Shaw representative for your unique project requirements.

**HEAD OFFICE**  
**Bredero Shaw**  
3838 N. Sam Houston Pkwy E.  
Suite 300  
Houston, Texas  
77032-3400, USA  
Phone: +1-281-886-2350  
solutions@brederoshaw.com

**NORTH AMERICA**  
**Bredero Shaw**  
Two Executive Place,  
200, 1824 Crowchild Trail, N.W.  
Calgary, Alberta  
T2M 3Y7, Canada  
Phone: +1-403-263-2255  
northamerica@brederoshaw.com

**LATIN AMERICA**  
**Bredero Shaw**  
3838 N. Sam Houston Pkwy E.  
Suite 300  
Houston, Texas  
77032-3400, USA  
Phone: +1-281-886-2350  
latinamerica@brederoshaw.com

**EUROPE, MIDDLE EAST,  
AFRICA & RUSSIA**  
**Bredero Shaw**  
Lakeside House  
1 Furzeground Way  
Stockley Park, Uxbridge  
UB11 1BD  
Phone: +44 (0) 208 622 3071  
EMAR@brederoshaw.com

**ASIA PACIFIC**  
**Bredero Shaw**  
101 Thomson Road  
#17-01/02 United Square  
Singapore 307591  
Phone: +65-6732-2355  
asiapacific@brederoshaw.com